



CONDENSED SPEC SHEET*


Grade Name: NeoWhite Bliss

SUBSTANCE (GSM)	CALIPER (μM)	STIFFNESS-L&W (mN)		
Tappi T 410	Tappi T 411	Tappi T 556		
		MD	CD	GM
230	308	137	64	94
240	324	154	73	106
250	338	161	80	113
270	370	203	101	143
280	384	226	113	160
290	397	251	125	177
300	411	279	139	197
320	438	339	169	239
330	452	361	180	255
350	490	444	222	314
360	504	490	245	346
TOL : ± 4%		± 5%		± 15%

CERTIFICATIONS & COMPLIANCES	
Manufacturing	ISO 9001, ISO 14001, OHSAS 18001
Environmental & Safety	FSC™ CoC, PCF, CII GreenCo Platinum, SMETA 4 Pillar

PARAMETER	UNITS	VALUE
COBB	TOP	g/m ² 50 MAX 50 MAX
	BACK	
ROUGHNESS - BENDTSEN	TOP	ml/min 50 MAX 500 MAX
	BACK	
PLYBOND	J/m ²	150 MIN
IGT - DRY PICK- (Medium Viscosity)	TOP	m/sec 0.7 MIN
	BACK	
BRIGHTNESS ISO	TOP	% 83 MIN 80 MIN
	BACK	
WHITENESS INDEX	TOP	% 105
	BACK	
GLOSS at 75° (Avg.)	TOP	% 38 MIN
	BACK	
MOISTURE	%	230 - 300 GSM 301 - 390 GSM 6.5 - 8.0 7.0 - 8.5

CONSTRUCTION

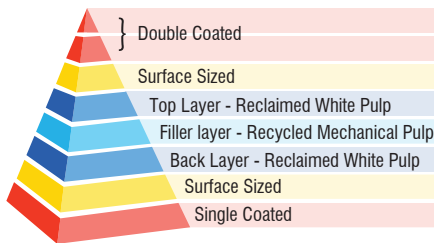

Note :

1. All Properties are according to ITC PSPD Measurements
2. Test Climate 23°C ± 1 & 50% ± 2 RH
3. Tolerances are based upon 95% Confidence limits of single mill measurements of conditioned random samples
4. All parameters are measured as per relevant Tappi standards



FMCG



CONSUMER
ELECTRONICS



PHARMA



GARMENTS



DIGITAL



CULTURAL /
CARDS