


Polyart Iridescent for HP Indigo



- Iridescent coating on both sides
- Available in pearl blue and gold
- Filled HDPE film
- Cavitated core (density = 0.8 g/cm³)

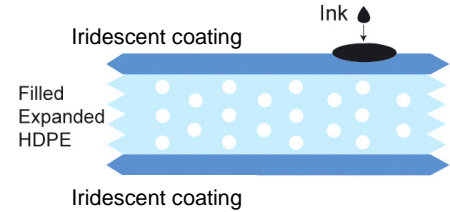

Provisional datasheet



| Property | Method | Units | Typical values | | | |
|--------------------|---------------|-------------------|----------------|------|------|-----|
| Weight | ISO 536 | g/m ² | 126 | 226 | 276 | |
| Thickness | ISO 534 | µm | 166 | 285 | 345 | |
| Density | | g/cm ³ | 0.76 | 0.79 | 0.80 | |
| Opacity | DIN 53146 | % | 96 | 98 | 98 | |
| Tensile strength | ISO 527-3 | N/mm ² | | | | |
| | | | MD | 44 | 42 | 38 |
| | | | TD | 35 | 34 | 27 |
| Elongation @ break | ISO 527-3 | % | MD | 150 | 190 | 195 |
| | | | TD | 200 | 205 | 210 |
| Tear strength | ASTM D1004-66 | N/mm | MD | 88 | 86 | 72 |
| | | | TD | 130 | 125 | 95 |

Advice in this document is based on practical field experience and given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information.

