


Polyart Laser

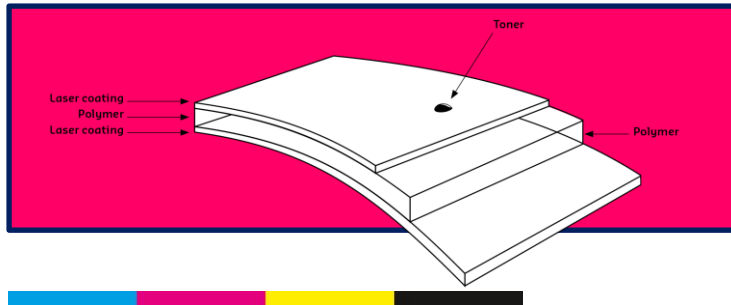

- White opaque PET base film
- High performance matt clay coating on both sides
- Anti-static treatment

PROVISIONAL DATASHEET

Property	Method	Units	Typical values		
Weight	ISO 536	g/m²	83	190	368
Thickness	ISO 534	µm	70	145	270
Density		g/cm³	1.17	1.31	1.36
Brightness	ISO 2410-2	%	96	96	96
Opacity	ISO 2471	%	91	96	99
Tensile strength	ISO 525-3	N/mm²			
MD			118	109	98
TD			127	116	105
Elongation @ break (min)	ISO 527-3	%			
MD			100	100	100
TD			80	80	80

Advice in this document is based on practical field experience and given in good faith but Arjobex, the manufacturer of Polyart synthetic papers, may not be held liable for loss or damage arising from action based on this information.

BENEFITS

- Unique touch, feels like paper
- Matt finish to enhance clarity of colours
- Excellent print reproduction
- Excellent toner adhesion
- Optimum press runnability
- Water and tear resistant